

**CLEVER SERIES
Reception Station
Return**


Recommended Tools
None

Package Contents	Qty.
• Reception Station	1
• Return	1

1

The reception station should be in its final position. Align the return to be attached. The quick fasteners are on the underside of all joining worksurfaces (Figure A).


Figure A

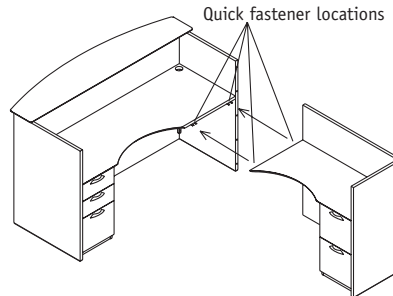

2

Quick fasteners are comprised of a male and female half (Figure B).


Figure B

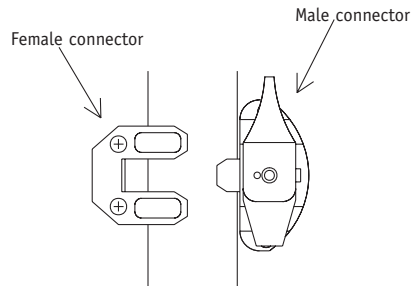

3

Slide the return against the reception station, making sure all quick fasteners fully engage and both worksurfaces are flush with no gaps (Figure C).


Figure C

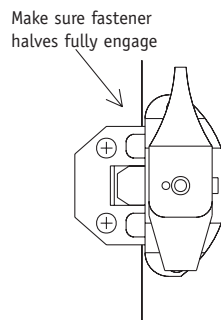

4

Rotate the clasp on the male half on one fastener, making sure it engages the flange on the female half (Figure D).

Figure D

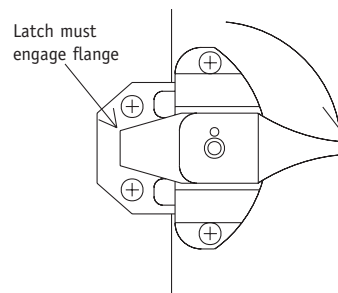

NATIONAL

Furniture with Personality™

Telephone 800.482.1717
Fax 812.482.8800
www.nationalonline.com

Form #NAICLRSR
Part #1604941

Printed in U.S.A
© 2002 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service.


CASEGOODS

Assembly Instructions

CLEVER SERIES Reception Station Return


- 5** Continue to turn the clasp until it tightens securely (Figure E).

Figure E

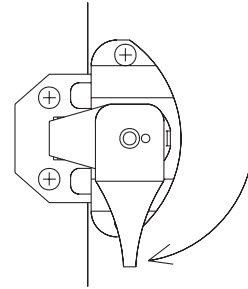

- 6** Repeat steps 4 and 5 to secure any other fasteners. Make sure worksurfaces on both units are flush and that there are no gaps (Figure F).

Figure E

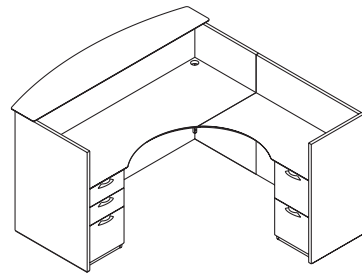

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service.