

ADMIRE

ADMIRE PRODUCT SPECIFICATIONS 55 SERIES

FRAME CONSTRUCTION

- Constructed of exterior beech with mortise and tenon joints that are securely glued for maximum joint stability
- Non-marring nylon glides

SEAT CONSTRUCTION

- 2" high grade polyurethane foam covers a plywood panel with high tension strip webbing for comfort
- Corner blocks screwed and glued in all four corners of the seat

BACK CONSTRUCTION (ALL MODELS)

- Features exterior rails and/or slats cut from steam bent beech wood

BACK CONSTRUCTION (N55AA, N55BB, N55EE, N55HH MODELS)

- 1" high grade polyurethane foam covers the front of a molded contour plywood back for support and comfort
- The outer (extreme) back features ½" of high grade polyurethane foam

CONTRASTING FABRICS


- All models available with contrasting fabric

FINISH

- A catalyzed top coat resists denting, peeling, and reactions to chemicals
- Can be cleaned with a damp cloth
- When specifying Brighton and Natural finish, variation in color is acceptable due to the nature of beech wood characteristics

WOOD SPECIES

- Beech

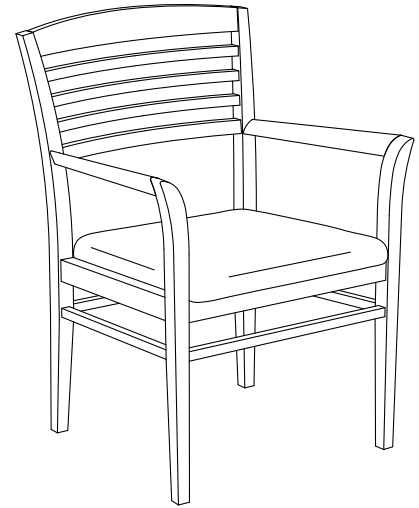

All Admire models may be ordered to meet TB133 fire code.

To order seating to meet the TB133 fire code, specify an "F" at the end of the model number (Ex: N55AAF).

For TB133 pricing, go to www.NationalOfficeFurniture.com/TB133

Please consult customer service for applicable Arc-Com, COM, Maharam, Momentum, Stinson or Ultrafabrics fabric.