

**CLEVER SERIES
Bullet Unit
(with and without
modesty panel)**

Recommended Tools


- Screwdriver
- Level

Package Contents	Qty.
• Bullet Worksurface	1
• End Panel	1
• Support Panel	
(if no modesty panel)	1
• Modesty Panel (if needed)	1
• T-Bracket	
(if no modesty panel)	1
• Leg Collar (if needed)	1
• Wood Screws	36

1

Turn bullet worksurface face down on a smooth, hard surface. Make sure to not mar the worksurface (Figure A).


Figure A

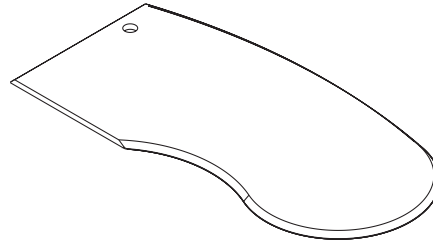

2

Attach column leg to underside of worksurface using screws provided with column leg (Figure B).


Figure B

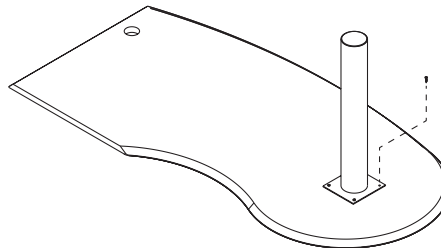

3

Attach end panel to worksurface by inserting provided screws through brackets on panel and into pre-drilled holes in worksurface (Figure C).


Figure C

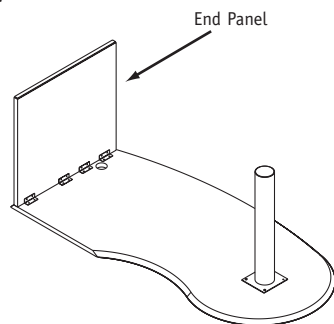

4

If unit will not have a modesty panel, attach support panel to worksurface and end panel by inserting provided screws through brackets on support panel and into pre-drilled holes in worksurface and end panel. Tighten all screws securely (Figure D).

Figure D

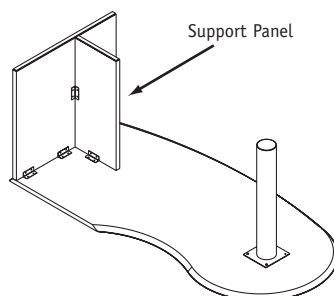

NATIONAL

Furniture with Personality™

Telephone 800.482.1717
Fax 812.482.8800
www.nationalonline.com

Form #NAICLBU
Part #1567847


Printed in U.S.A
© 2002 Kimball International, Inc.

Proper product installation, in accordance with these instructions, is the responsibility of the installing agent. If you have any questions concerning these instructions, please call National Customer Service.

**CLEVER SERIES
Bullet Unit
(with and without
modesty panel)**


5 If unit has a modesty panel, attach modesty panel to worksurface and end panel by inserting provided screws through brackets in modesty panel and into pre-drilled holes in worksurface and end panel. Tighten all screws securely (Figure E).

Figure E

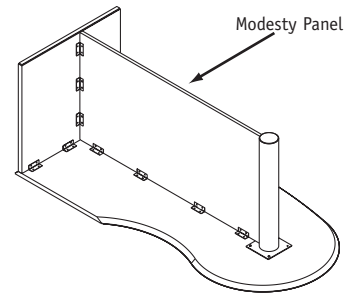


6 Slide leg collar over column leg and attach to modesty panel with screw provided (Figure F).

Figure F

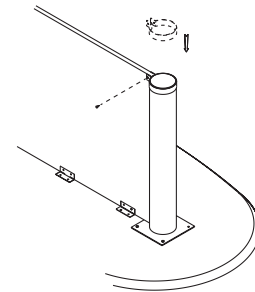

7 If unit has no modesty panel, attach T-bracket to intersection of end panel and support panel using screws provided (Figure G).

Figure G

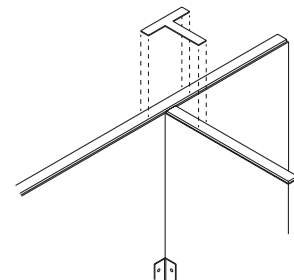

8 Carefully turn unit upright into final position. Level unit (Figure H).

Figure H

